

# XIS-1517™ 200kV

## PRODUCT HIGHLIGHTS

200kV Generator for Cargo Scanning

Windows® Operating System with Intel® Core™ Processor

Field Proven Reliability

Real-Time Diagnostics

Enhanced Imaging™



## PRODUCT DESCRIPTION

The XIS-1517 200kV™ is a robust X-Ray Inspection System (XIS) designed for screening cargo at logistics hubs and customs centers. The system is equipped with a heavy steel roller bed 38.3 cm (15.0") above the ground for convenient loading and unloading of freight. Its 200kV generator is capable of penetrating over 50 mm of steel for high-quality imaging beyond competing machines with its tunnel size.

## ABOUT ASTROPHYSICS

Since 2002, Astrophysics has led the industry in research and development, creating integrated solutions to advance the critical security missions of our customers and partners. Headquartered outside of Los Angeles, CA in the USA, Astrophysics has over 40,000 systems deployed in more than 150 countries, safeguarding critical infrastructure, aviation, and ports and border sites worldwide.

# XIS-1517™ 200kV

## GENERAL SPECIFICATIONS

Tunnel Size: (WxH)	150.2 cm x 170.2 cm 59.1" x 67.0"
Dimensions: <sup>1</sup> (LxWxH)	731.2 cm x 259.1 cm x 225.1 cm 287.9" x 102.0" x 88.7"
Net Weight: <sup>1</sup>	3697 kg (8150 lbs)
Shipping Weight: <sup>1</sup>	4500 kg (10031 lbs)
Conveyor Speed:	20 cm/s (40 ft or 12m/min) Forward or Reverse
Conveyor Height:	38.3 cm (15.0") from Floor
Conveyor Capacity:	2000 kg (4409 lbs) Evenly Distributed Load

## X-RAY GENERATOR & IMAGE PERFORMANCE

Voltage:	200kV
Tube Current:	1.0 mA
Wire Resolution: <sup>2</sup>	40 AWG Typical, 38 AWG Standard
Steel Penetration: <sup>2</sup>	52 mm Typical, 50 mm Standard
Duty Cycle:	100%, No Warm-Up Procedure Required
Beam Direction:	Horizontally Sideward
Detector:	2176 Channels in an L-Shaped Array

## COMPUTER & VIDEO

Platform:	Windows® 10 OS
Display Type:	Dual 24" Flat Panel Monitors
Display Resolution:	1920 x 1200
Memory:	8 GB RAM
Storage Capacity:	256 GB SSD

## ENVIRONMENTAL

Operating Temperature:	0°C to 40°C / 32°F to 104°F
Storage Temperature:	-20°C to 60°C / -4°F to 140°F
Humidity:	Up to 95% Non-Condensing

## ELECTRICAL

System Power:	110VAC +/- 10% 50/60Hz, 15 Amp Max 220 VAC +/- 10% 50/60Hz, 10 Amp Max
Power Conditioner:	Uninterruptible Power Supply (UPS) (Computer Operation)

## HEALTH & SAFETY

Compliant with USFDA Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)  
Typical radiation leakage is less than 0.1 mR/hr  
(Leakage less than 0.5 mR/hr permitted by U.S. Federal Standards)

## ISO 9001 & ISO 14001 CERTIFIED



<sup>1</sup>Weight and dimensions of the system may vary depending on customization.

<sup>2</sup>As tested on Astrophysics Inc. Test Piece.

<sup>3</sup>Optional Features may affect lead time, price, and weight of product. Please contact your Astrophysics Sales Representative for more information.

Due to continued product development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.  
Contact [sales@astrophysicsinc.com](mailto:sales@astrophysicsinc.com) for the most updated brochures.



## FEATURES

### STANDARD

- 3 & 6 Color Imaging
- Black & White Imaging
- Enhanced Imaging™ Mode
- High Penetration Function
- Organic/Inorganic Imaging
- Pseudo Color
- Reverse Monochrome
- Atomic Z-Number Measurement
- Geometric Image Distortion Correction
- Material Discrimination
- Real-Time Image Manipulation
- Auto Image Archiving
- Image Review
- Save Image (RGB)
- Baggage Counter
- Image Annotation
- JPEG Conversion
- Print Image Capable
- Multi-Tier Accessibility
- Network Ready
- Real-Time Self Diagnostics
- 9 Quadrant Zoom
- Continuous Scanning
- Continuous Zoom Up to 64x
- Vertical Zoom Panning

### OPTIONAL

- Barcode Scanning
- Density Alert
- Local Language
- Safe Passage® Computer Based Training
- Screen Assist Software
- Test Case
- Threat Image Projection (TIP) Software
- Central Management System Integration
- Multiplexing
- Custom Paint
- Entry/Exit Roller Tables
- Environmental Kit
- External USB Ports
- Conveyor Capacity Load Increase
- Variable Conveyor Speed
- Footmat Operator Interlock
- Radiation Meter
- Remote Workstation Configuration

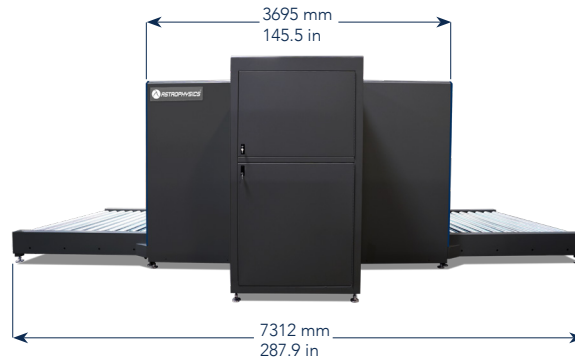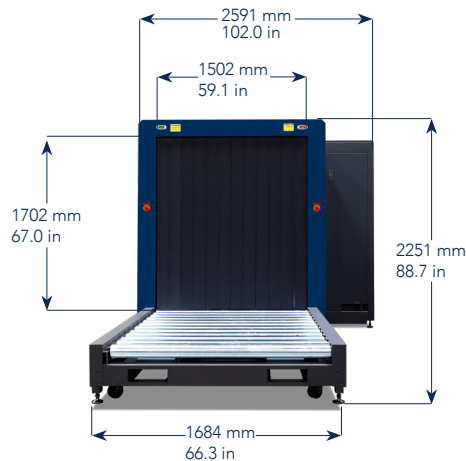

CARGO

DCOH3173 P/N 50-00-PB37-00 Rev. H

**Astrophysics HQ**  
+1.909.598.5488

**Astrophysics – EMEA**  
+961.9.832.500

**Astrophysics – INDIA**  
+91.11.41709990

**Astrophysics – ASIA**  
+63.2.812.0033