

# XIS-1818™ 200kV

## PRODUCT HIGHLIGHTS

200kV Generator

Windows® Operating System with Intel® Core™ Processor

Enhanced Imaging™

Real-Time Diagnostics

Field Proven Reliability



## PRODUCT DESCRIPTION

The XIS-1818 200kV™ is a high-capacity X-Ray Inspection System (XIS) designed for screening heavy cargo at airports, seaports, and transportation facilities. It features a heavy duty roller bed and a low conveyor 38 cm (15") from the ground, convenient for loading and unloading freight. The system's short tunnel and continuous roller operation enables high throughput, without sacrificing image quality due to Astrophysics best-in-class software design.

## ABOUT ASTROPHYSICS

Since 2002, Astrophysics has led the industry in research and development, creating integrated solutions to advance the critical security missions of our customers and partners. Headquartered outside of Los Angeles, CA in the USA, Astrophysics has over 40,000 systems deployed in more than 150 countries, safeguarding critical infrastructure, aviation, and ports and border sites worldwide.

# XIS-1818<sup>TM</sup> 200kV

## GENERAL SPECIFICATIONS

Tunnel Size:	180.7 cm x 180.4 cm (WxH) 71.1" x 71.0"
Dimensions: <sup>1</sup> (LxWxH)	731.2 cm x 289.6 cm x 235.3 cm 287.9" x 114.0" x 92.6"
Net Weight: <sup>1</sup>	4037 kg (8900 lbs)
Shipping Weight: <sup>1</sup>	4806 kg (10595.4 lbs)
Conveyor Speed:	10 cm/s (20 ft or 6m/min) Forward or Reverse
Conveyor Height:	38.6 cm (15.2") from Floor
Conveyor Capacity:	3000 kg (6614 lbs) Evenly Distributed Load

## X-RAY GENERATOR & IMAGE PERFORMANCE

Voltage:	200kV
Tube Current:	1.0 mA
Wire Resolution: <sup>2</sup>	40 AWG Typical, 38 AWG Standard
Steel Penetration: <sup>2</sup>	52 mm Typical, 50 mm Standard
Cooling:	Sealed Di-Electric Oil Bath with Forced Air
Duty Cycle:	100%, No Warm-Up Procedure Required
Beam Direction:	Horizontally Sideward

## COMPUTER & VIDEO

Platform:	Windows® 10 OS
Display Type:	Dual 24" Flat Panel Monitors
Memory:	8 GB RAM
Storage Capacity:	256 GB SSD
Display Resolution:	1920 x 1200

## ENVIRONMENTAL

Operating Temperature:	0°C - 40°C / 32°F - 104°F
Storage Temperature:	-20°C - 60°C / -4°F - 140°F
Humidity:	Up To 95% Non-Condensing

## ELECTRICAL

System Power:	110VAC +/- 10%, 50/60Hz, 20 Amp Max 220VAC +/- 10%, 50/60Hz, 15 Amp Max
Power Conditioner:	Uninterruptible Power Supply (UPS) (Computer Operation)

## HEALTH & SAFETY

Compliant with USFDA Center for Devices and Radiation Health Standards for Cabinet X-Ray Systems (21-CFR 1020.40)  
Typical radiation leakage is less than 0.1 mR/hr  
(Leakage less than 0.5 mR/hr permitted by U.S. Federal Standards)

## ISO 9001 & ISO 14001 CERTIFIED



<sup>1</sup>Weight and dimensions of the system may vary depending on customization.

<sup>2</sup>As tested on Astrophysics Inc. Test Piece.

<sup>3</sup>Optional Features may affect lead time, price, and weight of product. Please contact your Astrophysics Sales Representative for more information.

Due to continued product development, Astrophysics Inc. reserves the right to amend all technical specifications without prior notice.  
Contact [sales@astrophysicsinc.com](mailto:sales@astrophysicsinc.com) for the most updated brochures.

## FEATURES

### STANDARD

3 & 6 Color Imaging  
Black & White Imaging  
Enhanced Imaging<sup>TM</sup> Mode  
High Penetration Function  
Organic/Inorganic Imaging  
Pseudo Color  
Reverse Monochrome

Auto Image Archiving  
Image Review  
Save Image (RGB)

Atomic Z-Number Measurement  
Geometric Image Distortion Correction  
Material Discrimination  
Real-Time Image Manipulation

Baggage Counter

Image Annotation  
JPEG Conversion  
Print Image Capable

Multi-Tier Accessibility  
Network Ready  
Real-Time Self Diagnostics

9 Quadrant Zoom  
Continuous Scanning  
Continuous Zoom Up to 64x

### OPTIONAL


Barcode Scanning  
Density Alert  
Local Language  
Safe Passage<sup>®</sup> Computer Based Training  
Screener Assist Software  
Test Case  
Threat Image Projection (TIP) Software

Conveyor Capacity Load Increase  
External USB Ports  
Variable Conveyor Speed

Custom Paint  
Entry/Exit Roller Tables  
Environmental Kit

Footmat Operator Interlock  
Long Conveyor

Radiation Meter  
Remote Workstation Configuration

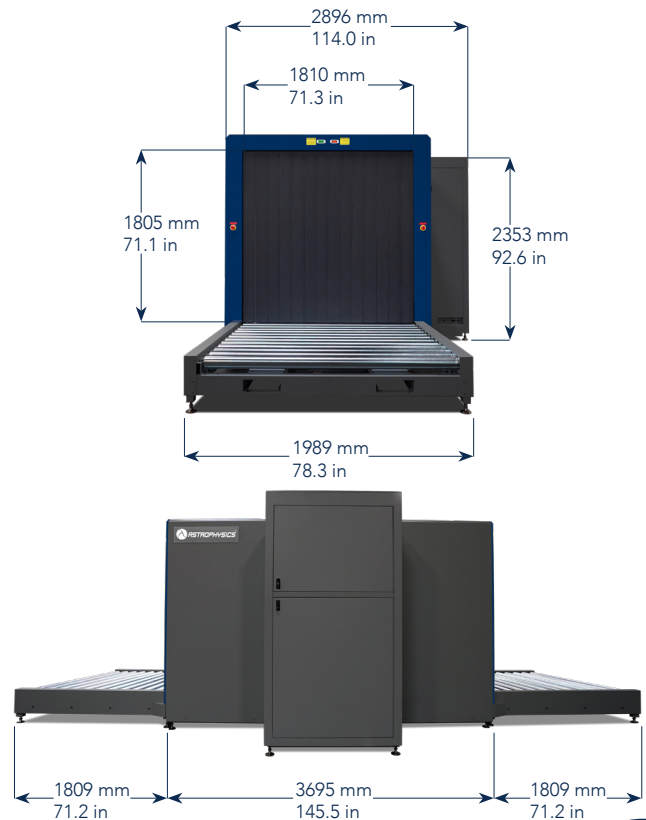

CARGO

DCOH3173 P/N 50-00-PB40-00 Rev. L

Astrophysics HQ  
+1.909.598.5488

Astrophysics – EMEA  
+961.9.832.500

Astrophysics – INDIA  
+91.11.41709990

Astrophysics – ASIA  
+63.2.812.0033